

**FK** **FUKE** 福客®

**FUKE**

**Boutique Manufacturing  
Conquer The World With Quality**



**FK7-2000T**

进 取 不 止

[www.fukeonline.com](http://www.fukeonline.com)

[fk002@fukebn.com](mailto:fk002@fukebn.com)

FUKE FK7-2000T

## *Basic Information*

Height of coupler

**880mm±10**

Weight

**18000kg**

Coupling type

**Customizable**

Gauge

**Customizable**

Engine power

**162kw**


Manufacturer

**FUKE**

[www.fukeonline.com](http://www.fukeonline.com)

[fk002@fukebn.com](mailto:fk002@fukebn.com)

## Outline

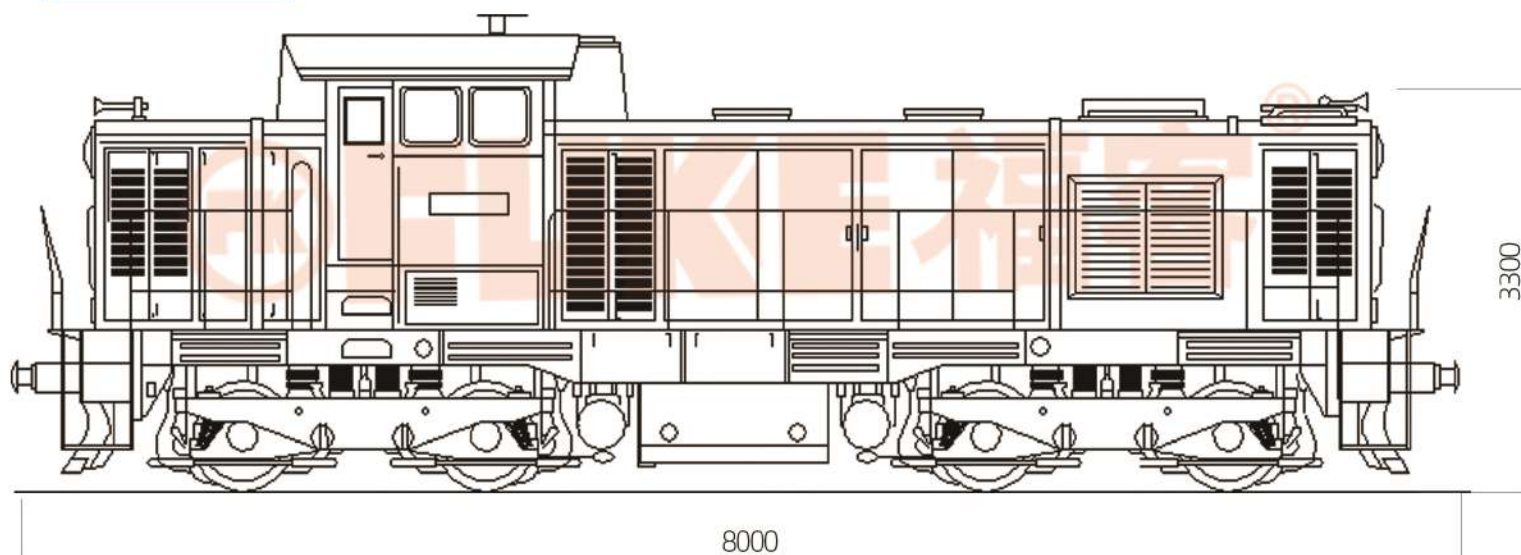

## Technical Specification

Length x width x height (about)	8000*2300*3300mm
The engine power	162kw
The weight	18000kg
Coupling type	Customizable
Height of coupler	880mm±10/ (Customizable)
The traction tonnage	≤2000t
Tire model	1320-360A16
The transmission way	Hydraulic transmission
Driver model	Four-wheel drive
Rail passing radius	≥100m
Brake type	Single engine clamp disc braking
Transition time between trains	No more than 3 minutes
Gauge	Customizable
Speed(overloading)	5-10Km/h
Speed(no-load)	20Km/h

## Product Description

The vehicle is equipped with traffic monitoring system, hydraulic lifting lock system, one-key self-locking system for railway and railway conversion, special braking system for railway and railway dual-use tractor, anti-falling track system, obstacle clearance system, air conditioning system, etc. High cost performance, energy saving, environmental protection and noise reduction.

