

FK **FUKE** 福客®

FK65-9

进 取 不 止

FUKE

**Boutique Manufacturing
Conquer The World With Quality**






FK65-9

Total Weight: 6200 kg

Standard bucket capacity: 0.23 m³

Rated power: 39/2200 kW/rpm

- New generation products
- National Three Emissions
- Advanced hydraulic system
- Efficient leveling ability
- Durable metal cover
- Safe and comfortable cab
- Convenient maintenance

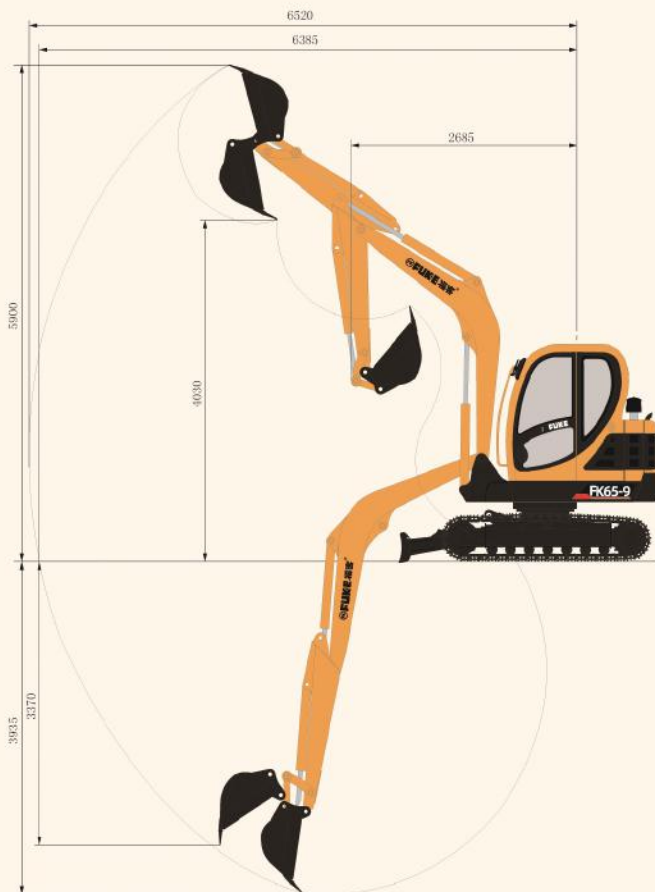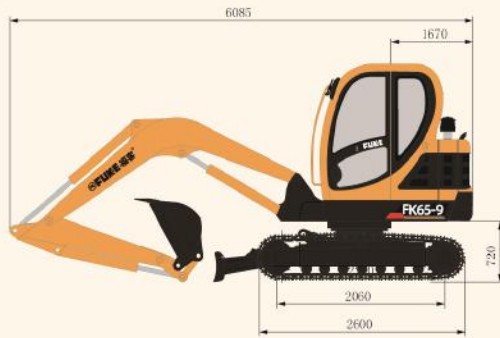

Technical specifications

Basic parameters

Total Weight	6200 kg
Standard bucket capacity	0.23 m ³
Standard bucket width	775 mm

Performance parameter

Engine	Yanmar
Engine rated power	39/2200 kW/rpm
Gradeability	35 °
Maximum digging force of stick	32.9 kN
Maximum digging force of bucket	42.3 kN
Driving speed	2.3/3.8 km/h
Main traction force	53.89 kN
Platform rotation speed	11-13.5 rpm

Job parameters

Maximum digging height	5900 mm
Maximum digging depth	3935 mm
Maximum digging radius	6520 mm
Maximum ground excavation radius	6385 mm
Maximum unloading height	4030 mm
Minimum radius of gyration	2685 mm
Maximum vertical digging depth	3370 mm

Transport size

Overall length (transport state)	6085 mm
Overall width (transport state)	1962 mm
Overall height (transport state)	2635 mm

Other parameters

Track width	1920 mm
Track length	2600 mm
Track shoe width	400 mm
Minimum ground clearance	335 mm
Balance weight off the ground	720 mm
Radius of tail gyration	1670 mm
Track wheelbase	2060 mm
Fuel tank capacity	122 L
Hydraulic oil tank capacity	77 L

安徽福客重工设备有限公司
Anhui Fuke Heavy Industry Equipment Co., Ltd.

Contact us:
Phone/Whatsapp:+8613505697380
Email:fk002@fukebn.com/fuke7380@gmail.com

www.fukeonline.com

